



JIS F3403

SOLID THIMBLE FOR RIGGING SCREW

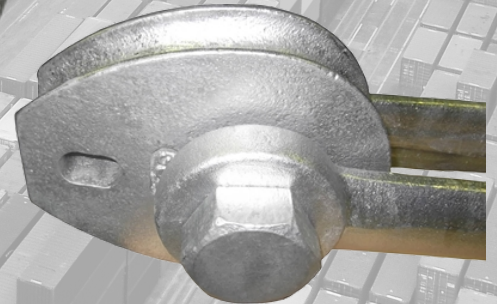

Material : FC150

Surface Treatment :
Self Color or Hot Dip
Galvanizing

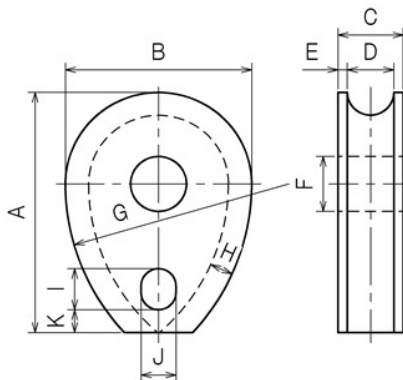

Cable diameter	(mm)										
	A	B	C	D	E	F	G	H	I	J	K
14	105	80	28	20	4	24	96	10	18	15	10
16	126	96	32	24	4	26	115	12	20	15	15
18	135	103	35	27	4	30	123	13	25	18	15
22	153	118	38	30	4	30	138	15	25	18	18
24	170	132	42	34	4	32	154	17	30	20	20
25	180	140	44	36	4	35	163	18	30	20	20
30	194	150	48	38	5	41	174	19	35	20	20
32	208	162	52	42	5	41	186	21	35	25	25
34	220	172	55	45	5	45	196	22	35	25	25
36	234	182	57	47	5	48	208	23	40	25	25
38	248	194	62	50	6	50	220	25	40	30	30
40	268	212	66	54	6	55	237	27	40	35	35
42	294	233	72	60	6	59	256	30	40	35	35
45	294	233	72	60	6	63	256	30	40	35	35
48	307	244	78	64	7	67	267	32	40	35	35
50	307	244	78	64	7	67	267	32	40	35	35

**We can also manufacture the products by using other materials and applying surface treatment other than the above.

AUZAC CO.,LTD.

26-229, Tomochoushiroji, Fukuyama-shi, Hiroshima, Japan

mail:info@auzac.jp

HP:https://www.auzac.jp/en/

